




Likao Bearing Co., Ltd.

3 mm x 8 mm x 3 mm nsk 693 bearing

Bearing No. 693

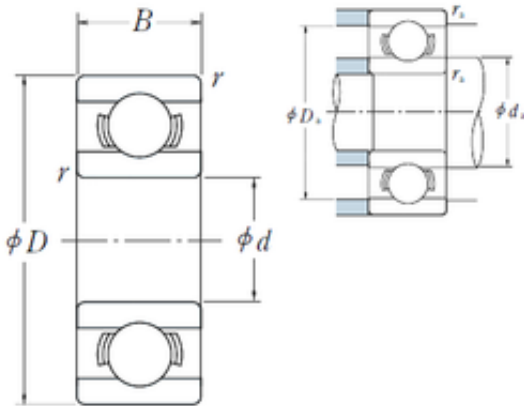

693 Bearing 2D drawings and 3D CAD models

| | |
|-------------------------------|--------------|
| Size | 3x8x3 mm |
| Bore Diameter | 3 mm |
| Outer Diameter | 8 mm |
| Width | 3 mm |
| d | 3 mm |
| D | 8 mm |
| B | 3 mm |
| C | 3 mm |
| r min. | 0,15 mm |
| da min. | 4,2 mm |
| Da max. | 6,8 mm |
| ra max. | 0,15 mm |
| Weight | 0,00061 Kg |
| Basic dynamic load rating (C) | 0,56 kN |
| Basic static load rating (C0) | 0,179 kN |
| (Grease) Lubrication Speed | 60 000 r/min |
| SRI | 0.89 |
| hidYobi | 693 |
| LangID | 1 |
| D_ | 8 |
| SREX | 0.02 |
| B_ | 3 |
| hidTable | ecat_NSESBM |
| C0r | 18 |
| Oil rpm | 67000 |
| SRE | 0.89 |



Likao Bearing Co., Ltd.

| | |
|------------|-----------|
| mass | 0.61 |
| GRS rpm | 60000 |
| ra | 0.15 |
| SRIX | 0.02 |
| D_a | 6.8 |
| Cr | 57 |
| SRIN | 0 |
| C0 | 0.179 |
| fo | 11.83 |
| SREN | 0 |
| DE_ | 7.088 |
| Prod_Type3 | ESM_MD_OT |
| da | 4.2 |
| DA_ | 1.588 |
| Z_ | 6 |
| yobi | 693 |
| SDM_ | 5.5 |
| r | 0.15 |
| KBRG | 6102 |
| DI_ | 3.912 |
| B0 | 3 |